

m-flex dock

flexible adaptations to test heads, prober and handler

high docking force

precise docking

solid and robust design

repeatable docking



m-flex dock

universal docking solution

key features

high precise docking
flexible adaptations
field proofed
repeatable docking
easy to adjust




specifications

dimensions 116 mm x 60 mm x 174 mm
weight 4 kg / 8.6 lbs

docking force per module 1000 N
docking travel 15 mm

mechanical driven - synchronized

z-stack compensation up to 25 mm
repeatable accuracy x/y ± 0.05 mm z < 0.1 mm

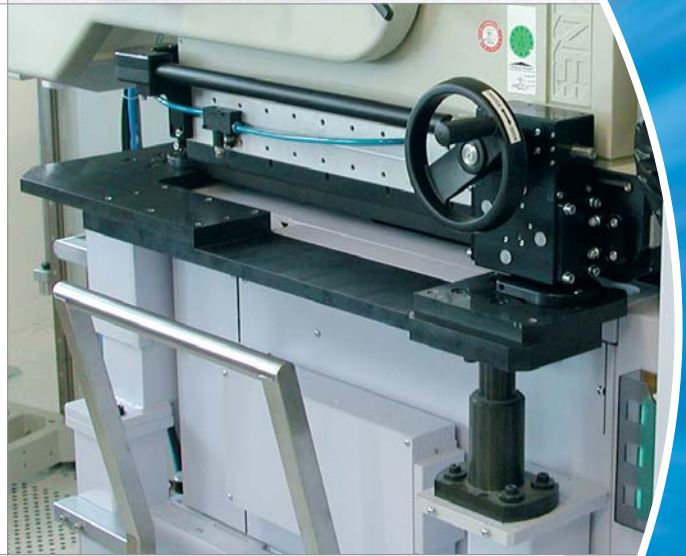

typical adaptations

advantest: T5377, T5588, T6575, T6672, T7721, T2000, T2000LS
credence: d40, d10, sapphire
eagle test systems: ETS 300, ETS 364
LTX Fusion X-series, HFi
nextest: Magnum
teradyne: Catalyst, J750, MicroFlex, Flex, UltraFlex
verigy



subject to technical change
without prior notice
© 2007



S2/S8
conform



esmo

esmo ag phone +49-8031-233 88 0
brückenstrasse 1 fax +49-8031-233 88 10
d-83022 rosenheim sales@esmo-ag.com
germany www.esmo-ag.com

esmo asia pte. ltd. phone +65-6562-8833
25 international business park fax +65-6562-8860
#03-112 german centre sales@esmo-asia.com
singapore 609916 www.esmo-ag.com

esmo usa inc. phone +1-408-982 9911
3350 scott blvd., suite #6102 fax +1-408-982 9933
santa clara, ca 95054 sales@esmo-usa.com
usa www.esmo-ag.com